



Chicago Pneumatic **Industrial** Tools



Mini catalogue

**High-performance products.
Designed for you !**

Impact Wrenches



RP9524

3/8" Square drive

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP8222	615 190 8222	3/8	11,500	250-400	184-295	450	331	15.0	32	177	6.96	1.15	2.53	89	100	3.9
RP9521	615 190 9521	3/8	11,000	6.8-70	5-50	122	90	4.7	10	146	5.75	1.2	2.6	84	95	4.9
RP9522	615 190 9522	3/8	9,500	6.8-70	5-50	122	90	4.7	10	146	5.75	0.9	2.0	86	97	2.6
RP9523	615 190 9523	3/8	11,000	6.8-70	5-50	122	90	4.7	10	146	5.75	1.2	2.6	84	95	4.9
RP9524	615 190 9524	3/8	8,500	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1	94	105	<2.5
RP9525	615 190 9525	3/8	8,500	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1	94	105	<2.5

All models - Air inlet (NPTF) 1/4"



RP8252

1/2" Square drive

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP8242	615 190 8242	1/2	11,500	250-400	184-295	650	479	15.0	32	177	6.96	1.2	2.6	89	100	3.9
RP8252	615 190 8252	1/2	9,000	300-800	220-590	1050	775	13.6	29	200	7.87	2.0	4.4	94	105	7.9
RP8253 Ext 2"	615 190 8253	1/2	9,000	300-800	220-590	1050	775	13.6	29	262	10.31	2.1	4.7	94	105	7.9
RP9526	615 190 9526	1/2	8,500	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1	94	105	<2.5
RP9527	615 190 9527	1/2	8,500	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1	94	105	<2.5
RP9540-B	615 190 2540	1/2	8,400	34-420	25-310	576	425	7.1	15	191	7.5	2.3	5.1	94	105	3.4
RP9541	615 190 9541	1/2	8,900	34-434	25-320	603	445	6.6	14	168	6.6	2.5	5.5	89	100	2.7
RP9542	615 190 9542	1/2	8,900	34-434	25-320	603	445	6.6	14	168	6.6	2.5	5.5	89	100	2.7
RP9543 HEX	615 190 9543	7/16	8,900	34-434	25-320	603	445	6.6	14	199	7.8	2.6	5.8	89	100	2.7
RP9545	615 190 9545	1/2	6,900	34-542	25-400	746	550	9.0	19	180	7.1	2.5	5.6	96	107	4.0
RP9546	615 190 9546	1/2	6,400	68-610	50-450	827	625	2.6	5.5	178	7.0	2.49	5.5	95	106	4.9

All models - Air inlet (NPTF) 1/4"



RP8242 MKIT - Metric - Included:
Part number: **615 190 8249**
- 1/2" Impact wrench RP8242 (Qty 1)
- Sockets (5) - 14, 16, 17, 19 & 22mm AF
- Bottle of air tool oil

RP9546 IKIT - Imperial - Included:
Part number: **615 190 8546**
- 1/2" Impact wrench RP9546 (Qty 1)
- Sockets (5) - 1/2", 5/8", 3/4", 7/8" & 5/16" AF
- Bottle of air tool oil



RP8252 MKIT - Metric - Included:
Part number: **615 190 8259**
- 1/2" Impact wrench RP8252 (Qty 1)
- Sockets (5) - 14, 16, 17, 19 & 22mm AF
- Bottle of air tool oil

RP9550-B IKIT - Imperial - Included:
Part number: **615 190 8550**
- 1/2" Impact wrench RP9540-B (Qty 1)
- Sockets (5) - 1/2", 5/8", 3/4", 7/8" & 5/16" AF

RP9546 MKIT - Metric - Included:
Part number: **615 190 0546**
- 1/2" Impact wrench RP9546 (Qty 1)
- Sockets (5) - 14, 16, 17, 19 & 22mm AF
- Bottle of air tool oil

RP9552-B MKIT - Metric - Included:
Part number: **615 190 8552**
- 1/2" Impact wrench RP9540-B (Qty 1)
- Sockets (5) - 14, 16, 17, 19 & 22mm AF



RP8072

3/4" Square drive

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP8072	615 190 8072	3/4	6,500	135-1300	100-960	1650	1217	17	36	230	9.05	4.85	10.7	94	100	3.9
RP8073 Ext 6"	615 190 8073	3/4	6,500	135-1300	100-960	1650	1217	17	36	387	15.2	5.85	12.9	94	105	9.0
RP8272	615 190 8272	3/4	6,500	135-1300	100-960	1650	1217	23	48	230	9.05	3.25	7.16	96	107	9.0
RP8274	615 190 8274	3/4	6,500	135-1300	100-960	1650	1217	23	48	230	9.05	3.25	7.16	96	107	9.0
RP8275 Ext 6"	615 190 8275	3/4	6,500	135-1300	100-960	1650	1217	23	48	382	15	3.88	8.55	96	107	9.0
RP9560	615 190 9560	3/4	4,200	200-950	150-700	1360	1000	11.3	24	244	9.6	4.80	10.5	99	110	4.9
RP9561	615 190 9561	3/4	5,500	102-680	75-500	1020	750	14.1	30	216	8.5	4.80	10.5	100	111	5.1

All models - Air inlet (NPTF) 3/8"



RP8272 MKIT - Metric - Included:
Part number: **615 190 8279**
- 1/2" Impact wrench RP8272 (Qty 1)
- Sockets (4) - 24, 27, 30 & 32 mm AF
- Bottle of air tool oil

RP9551 IKIT - Imperial - Included:
Part number: **615 190 9551**
- 1/2" Impact wrench RP9560 (Qty 1)
- Sockets (4) - 15/16", 1", 1-1/16" & 1-1/8" AF

RP9553 MKIT - Metric - Included:
Part number: **615 190 9553**
- 1/2" Impact wrench RP9560 (Qty 1)
- Sockets (4) - 24, 27, 30 & 32 mm AF



RP9582

1" Square drive

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION	AIR INLET
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²	NPTF
RP8084	615 190 8084	1	6,500	135-1300	100-960	1650	1217	17	36	230	9.05	5.05	11.13	94	105	9.0	3/8"
RP8085 Ext 6"	615 190 8085	1	6,500	135-1300	100-960	1650	1217	17	36	387	15.2	5.90	13.0	94	105	9.0	3/8"
RP9582	615 190 9582	1	4,200	200-1225	150-900	1900	1400	18.9	40	394	15.5	12.3	27.0	110	121	4.3	1/2"
RP9583 Ext 6"	615 190 9583	1	4,200	200-1225	150-900	1900	1400	18.9	40	564	22.2	13.5	29.8	110	121	4.3	1/2"
RP9597	615 190 9597	1	4,700	407-1898	300-1400	2712	2000	22.7	48	241	9.50	9.10	20.0	101	112	13.0	1/2"

Ratchet Wrenches



RP9427

NEW
NEW

NEW
NEW

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP9425	615 191 9425	1/4	200	7	5	20	15	4.7	10	165	6.5	0.85	1.9	87	98	6.2
RP9426	615 191 9426	1/4	275	7	5	35	27	5.9	12.5	130	5.10	0.49	1.08	82	93	5.5
RP9427	615 191 9427	3/8	275	7	5	35	27	5.9	12.5	130	5.10	0.50	1.11	82	93	4.5
RP9429	615 191 9429	3/8	150	14	10	68	50	7.5	16	254	10	1.20	2.6	97	108	7.9
RP9430	615 191 9430	1/2	150	14	10	68	50	7.5	16	254	10	1.20	2.6	97	108	7.9
RP9431Q	615 191 9431	3/8	190	14	10	122	90	18.	39	305	12	1.20	2.7	79	-	14.8
RP9432Q	615 191 9432	1/2	190	14	10	122	90	18.5	39	305	12	1.20	2.7	79	-	14.8
RP9435	615 191 9435	3/8	160	13	10	70	50	2	4.25	260	10.25	1.19	2.63	98	109	7.2
RP9436	615 191 9436	1/2	160	13	10	70	50	2	4.25	260	10.25	1.19	2.63	98	109	7.2

All models- Air inlet (NPTF) 1/4"

RP9429 KIT - Metric - Included:
Part number: **615 191 0429**
- 3/8" Ratchet wrench RP9429 (Qty 1)
- Sockets (5) - 10, 13, 14, 16 & 17mm AF



NEW

RP9430 KIT - Metric - Included:
Part number: **615 191 0430**
- 1/2" Ratchet wrench RP9430 (Qty 1)
- Sockets (5) - 10, 13, 14, 16 & 17mm AF



NEW

Accessories

Socket sets



For complete information, please refer to our Impact Sockets catalogue.



STANDARD



DEEP (D)



UNIVERSAL (U)



DEEP UNIVERSAL (DU)



MAGNETIC (G)



DEEP MAGNETIC (DG)

SD2114



SD2114D



SD3113D



SD3113G



SD3113DG



SD4114



SD4114D



SD4114DU



PART NUMBER	# OF PIECES	CONTENT
SS2114	14	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS2114D	14	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS2112U	12	5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS2112G	12	5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS2112DG	12	5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS3113	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3113D	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3110U	10	10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3110DU	10	10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3113G	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3113DG	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS4114	14	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 & 27mm
SS4114D	14	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 & 27mm
SS4113U	13	12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23 & 24mm
SS4113DU	13	12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23 & 24mm
SS4112G	12	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20 & 21mm
SS4112DG	12	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20 & 21mm
SS618	8	26, 27, 29, 30, 32, 35, 36 & 38mm
SS618D	8	26, 27, 29, 30, 32, 35, 36 & 38mm
SS818	8	27, 30, 32, 33, 35, 36, 38 & 41mm
SS814D	4	27, 30, 32, 33 & 36mm
SS818D	8	27, 30, 32, 33, 35, 36, 38 & 41mm

SQUARE DRIVE (")



Screwdrivers

Direct Drive & Positive Clutch



RP2765

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION	AIR INLET
			MIN.		MAX.										
		rpm	Nm	in. lbs.	Nm	in. lbs.	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s²	NPTF
RP2754 (DD)	615 192 2754	1,450	-	-	5	44	8	17	210	8.3	0.9	2.0	77	<2.5	1/4"
RP2755 (DD)	615 192 2755	2,200	-	-	14	124	14	29	160	6.3	1.03	2.27	90	<2.5	1/4"
RP2764 (DD)	615 192 2764	600	-	-	14	124	8	17	228	9.0	1.0	2.20	77	<2.5	1/4"
RP2765 (DD)	615 192 2765	900	-	-	26	230	14	29	178	7.0	1.18	2.60	88	<2.5	1/4"
RP2780 (P)	615 192 2780	2,100	-	-	15	133	14	29	164	6.46	1.06	2.35	89	26.8	1/4"

All models - Output drive: Hex. 1/4F in. Clutch type: DD = Direct Drive / P = Positive Clutch



RP2041

Impact Screwdrivers

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION	AIR INLET
			MIN.		MAX.										
		rpm	Nm	in. lbs.	Nm	in. lbs.	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²	NPTF
RP2036	615 192 2036	10,000	3.4	30	16	142	6	13	223	8.78	0.78	1.73	83	6.9	1/4"
RP2037	615 192 2037	10,000	18	160	28	248	6	13	210	8.27	0.82	1.81	88	6.2	1/4"
RP2041	615 192 2041	15,000	8	71	42	372	9	19	152	5.98	1.04	2.29	89	4.8	1/4"
RP2042	615 192 2042	5,600	6	53	41	363	13	27	153	6.02	1.02	2.25	88	6.0	1/4"

All models - Output drive: Hex. 1/4F in.



RP2007

Roller and Shut-Off Clutches

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION	AIR INLET
			MIN.		MAX.										
		rpm	Nm	in. lbs.	Nm	in. lbs.	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²	NPTF
RP2003 (SO)	615 192 2003	1,100	0.4	3.5	1.5	13	4.1	9	197	7.7	0.4	0.9	73	<2.5	1/8"
RP2005 (SO)	615 192 2005	1,100	0.4	3.5	4.3	38	6.5	14	182	7.2	0.8	1.8	76	<2.5	1/8"
RP2006 (R)	615 192 2006	1,100	0.4	3.5	4.4	39	6.5	14	182	7.2	0.8	1.8	75	2.3-3.9	1/8"
RP2007 (SO)	615 192 2007	1,100	0.4	3.5	4.3	38	6.5	14	250	9.8	0.6	1.3	81	<2.5	1/8"
RP2008 (SO)	615 192 2008	1,100	0.4	3.5	4.3	38	6.5	14	275	10.8	0.7	1.5	76	<2.5	1/8"
RP2009 (R)	615 192 2009	1,100	0.4	3.5	4.4	39	6.5	14	250	9.8	0.6	1.3	77	9-35	1/8"
RP2010 (SO)	615 192 2010	1,470	2.0	18	5.5	49	9.0	20	253	10.0	0.9	2.0	76	<2.5	1/4"
RP2011 (R)	615 192 2011	1,470	2.0	18	5.5	49	9.0	20	278	10.9	0.9	2.0	73	16.1	1/4"
RP2012 (SO)	615 192 2012	1,470	2.0	18	5.5	49	9.0	20	278	10.9	0.9	2.0	73	<2.5	1/8"
RP2014 (R)	615 192 2014	1,470	2.0	18	5.5	49	9.0	20	220	8.7	1.0	2.2	81	3.2	1/4"
RP2015 (SO)	615 192 2015	1,470	2.0	18	5.5	49	9.0	20	220	8.7	1.0	2.2	81	<2.5	1/4"

All models - Output drive: Hex. 1/4F in. Clutch type: R = Roller / SO = Shut-Off

Accessories



SUSPENSION BAIL

MODEL	PART NUMBER
RP2005, RP2006	307683
RP2014, RP2015	473153
RP2012	467003

SIDE HANDLE

MODEL	PART NUMBER
RP2755, RP2765, RP2780	205 049 855 3
RP2012, RP2014, RP2015	467033

SCREWDRIVER SLOT BIT

MODEL	PART NUMBER
RP2036	894 020 079 1
RP2037	894 020 062 0
RP2041, RP2042	894 020 074 2

SCREWDRIVER SLOT BIT

MODEL	PART NUMBER
RP2012, RP2007, RP2011, RP2008	29932
RP2009, RP2014, RP2010, RP2015	29932
RP2003	69773

Drills



RP1274



RP9887



RP9285



RP9879

MODEL	PART NUMBER	FREE SPEED		POWER		CHUCK CAPACITY		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER
		rpm		kW	hp	mm	in.	Nm	ft lb	l/s	cfm	mm	in.	kg	lb		
RP1064	615 194 1064	2,500		0.23	0.30	10	3/8	1.8	1.32	9.3	19.7	225	8.9	0.7	1.5	83	-
RP1454	615 194 1454	4,300		0.23	0.30	10	3/8	1.0	0.74	9.3	19.7	225	8.9	0.7	1.5	83	-
RP1664	615 194 1664	2,000		0.19	0.26	10	3/8	1.8	1.32	9.3	19.7	225	8.9	0.7	1.5	83	-
RP1264	615 194 1264	2,900		0.28	0.38	10	3/8	1.8	1.32	9.3	19.7	175	6.9	0.9	2.0	78	-
RP1274	615 194 1274	2,900		0.28	0.38	10	3/8	1.8	1.32	9.3	19.7	175	6.9	0.9	2.0	78	-
RP9280	615 194 9280	3,200		0.23	0.30	6.4	1/4	2.6	1.92	9.0	19.0	142	5.6	0.6	1.3	82	-
RP9281	615 194 9281	2,700		0.2	0.27	6	1/4	2.26	20	16	7.55	157	6.18	0.68	1.5	87.3	-
RP9282	615 194 9282	2,700		0.2	0.27	6	1/4	2.26	20	16	7.55	157	6.18	0.7	1.54	87.3	-
RP9879	615 194 9879	1,300		0.18	0.25	10	3/8	4.7	3.46	8.5	18.0	200	8.0	0.7	1.5	91	102
RP9887	615 194 9887	2,800		0.37	0.50	10	3/8	4.7	3.46	12.0	26.0	215	8.5	0.9	2.0	88	99
RP9285	615 194 9285	2,900		0.38	0.50	10	3/8	5.3	3.91	10.0	21	165	6.5	1.1	2.4	89	100
RP9286	615 194 9286	600		0.38	0.50	13	1/2	20.0	14.70	11.5	24	177	7.0	1.8	4.0	90	101
RP9287	615 194 9287	2,900		0.38	0.50	10	3/8	5.3	3.91	10.0	21	199	7.83	1.15	2.5	89	100
RP9288	615 194 9288	600		0.38	0.50	13	1/2	20.0	14.70	11.5	24	251	9.88	1.51	3.3	90	101
RP9789	615 194 9789	800		0.27	0.37	13	1/2	12.4	9.14	11.5	24	177	7.0	1.8	4.0	90	101
RP9790	615 194 9790	2,000		0.27	0.37	10	3/8	4.8	3.54	11.5	24	165	6.5	1.4	3.0	89	100
RP9791	615 194 9791	800		0.27	0.37	13	1/2	12.4	9.14	11.5	24	237	9.33	1.42	3.1	90	101
RP9792	615 194 9792	2,000		0.27	0.37	10	3/8	4.8	3.54	11.5	24	216	8.5	1.18	2.6	89	100

All models - Vibrations <2.5m/s² / Spindle Thread 3/8-24 in. / Air Inlet 1/4" NPTF

RP9790 MKIT - Metric - Included:

Part number: 615 194 0790

- RP9790 Drill (Qty 1)

- Air nipple (1)

- Chuck key (1)

- Drill Bits (13) - 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.5 mm



RP9790 IKIT - Imperial - Included:

Part number: 615 194 8790

- RP9790 Drill (Qty 1)

- Air nipple (1)

- Chuck key (1)

- Drill Bits (13) - 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 11/64", 3/16", 13/64", 7/32", 15/64", 1/4"

Accessories

SCREWDRIVER KIT

DESCRIPTION

For use with all air drills.

Has quick-change slip chuck, three Phillips bits and two slotted bits

PART NUMBER

CA 155826

SIDE HANDLE

MODEL

RP9789, RP9791

RP9286, RP9288, RP2755, RP2765

PART NUMBER

205 049 855 3

205 049 854 3

REAR EXHAUST HOSE ASSEMBLY NOISE REDUCER

MODEL

RP9285, RP9286, RP9287, RP9288, RP9789, RP9790, RP9791, RP9792

RP9879, RP9887

PART NUMBER

205 051 649 3

205 051 290 3

TOOL	CAPACITY		THREAD MOUNT (in.)	CHUCK PART NUMBER	KEY PART NUMBER
	mm	in.			
RP1064	10	3/8	3/8-24	40002 (Chuck + Key)	34302
RP1454	10	3/8	3/8-24	40002 (Chuck + Key)	34302
RP1664	10	3/8	3/8-24	40002 (Chuck + Key)	34302
RP1264	10	3/8	3/8-24	40002 (Chuck + Key)	34302
RP9280	6.4	1/4	3/8-24	205 048 698 3	205 049 700 3
RP9281	6.4	1/4	3/8-24	205 046 698 3	205 049 700 3
RP9285	10	3/8	3/8-24	205 048 697 3 (Chuck + Key)	C142411
RP9286	13	1/2	3/8-24	205 048 696 3 (Chuck + Key)	C142411
RP9789	13	1/2	3/8-24	205 048 696 3 (Chuck + Key)	C142411
RP9790	10	3/8	3/8-24	205 048 697 3 (Chuck + Key)	C142411
RP9879	10	3/8	3/8-24	205 048 697 3 (Chuck + Key)	C142411
RP9887	10	3/8	3/8-24	205 048 697 3 (Chuck + Key)	C142411
RP9282	6.4	1/4	3/8-24	205 052 862 3 (Keyless chuck)	
RP1274	10	3/8	3/8-24	94952 (Keyless chuck)	
RP9791	13	1/2	3/8-24	205 050 207 3 (Keyless chuck)	
RP9792	10	3/8	3/8-24	205 050 206 3 (Keyless chuck)	
RP9287	10	3/8	3/8-24	205 050 206 3 (Keyless chuck)	
RP9288	13	1/2	3/8-24	205 050 207 3 (Keyless chuck)	

Grinders

Straight Die Grinders

MODEL	PART NUMBER	FREE SPEED		POWER		COLLET MAX CAPACITY		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION
		rpm		kW	hp	mm	in.	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²
RP9104Q	615 195 9104	60,000		0.04	0.054	3.2	1/8	3.5	7	133	5.2	0.2	0.5	71	8.3
RP9105	615 195 9105	30,000		0.18	0.25	6.4	1/4	9.0	19	163	6.4	0.4	0.8	84	6.8
RP9102	615 195 9102	30,000		0.22	0.30	6.4	1/4	12.0	25	121	4.75	0.34	0.75	96	5.4
RP9110	615 195 9110	30,000		0.18	0.25	-	1/4	9.0	19	256	10.0	0.7	1.5	84	4.0
RP9111Q	615 195 9111	22,000		0.35	0.46	6.0	1/4	11.5	25	170	6.7	0.7	1.5	84	5.0
RP9112Q	615 195 9112	22,000		0.35	0.46	6.0	1/4	11.5	25	330	13.0	1.3	2.9	80	3.5
RP9113	615 195 9113	24,000		0.37	0.50	6.4	1/4	10.5	22	146	5.75	0.57	1.25	92.6	4.8
RP9114	615 195 9114	22,000		0.30	0.40	6.4	1/4	13.0	27	146	5.75	0.57	1.25	101	<2.5

All models - Air Inlet 1/4" NPTF

RP9104Q KIT - Included:
Part number: 615 195 0104
 - RP9104Q Pencil Grinder (Qty 1)
 - 1/8" & 3mm collets included
 - Carbide burrs 3mm (5)
 - Mounted points 3mm (5)



RP9111Q IKIT - Imperial - Included:

Part number: 615 195 8111
 - RP9111 Collet Grinder (Qty 1)
 - 1/4" collet installed
 - 1/8" collet (1)
 - Mounted points 1/4" (5), 1/8" (5)



RP9111Q MKIT - Metric - Included:

Part number: 615 195 0111
 - RP9111 Collet Grinder (Qty 1)
 - 6mm collet installed
 - 3mm collet (1)
 - Mounted points 6mm (5), 3mm (5)



Pistol & Angle Die Grinders

MODEL	PART NUMBER	FREE SPEED		POWER		COLLET MAX CAPACITY		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION
		rpm		kW	hp	mm	in.	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²
RP9101	615 195 9101	22,500		0.15	0.20	6.4	1/4	11.0	23	122	4.80	0.45	1.0	101	3.0
RP9106	615 195 9106	25,000		0.15	0.20	6.4	1/4	8.5	16	120	4.7	0.7	1.5	81	<2.5
RP9107	615 195 9107	17,000		0.15	0.20	6.4	1/4	8.5	16	120	4.7	0.7	1.5	81	<2.5
RP9108	615 195 9108	25,000		0.18	0.25	6.4	1/4	9.0	19	200	7.9	0.5	1.1	84	4.4

All models - Air Inlet 1/4" NPTF

RP9101 KIT - Included:
Part number: 615 195 0101
 - RP9101 Angle Grinder (1)
 - ø 50mm (2") Sanding backing pad (1)
 - ø 50mm (2") 50 Grit sanding disc (1)
 - ø 50mm (2") 36 Grit sanding disc (1)
 - ø 50mm (2") 24 Grit sanding disc (1)
 - ø 50mm (2") Surface preparation pad (fine, medium, coarse) (3)



RP9107 IKIT - Imperial - Included:
Part number: 615 195 8107
 - RP9107 Pistol grip Grinder (Qty 1)
 - Spanners (2)
 - 1/4" collet installed
 - 1/8" collet (1)
 - Mounted points 1/4" (5), 1/8" (5)



RP9107 MKIT - Metric - Included:
Part number: 615 195 0107
 - RP9107 Pistol grip Grinder (Qty 1)
 - Spanners (2)
 - 6mm collet installed
 - 3mm collet (1)
 - Mounted points 6mm (5), 3mm (5)



Angle Grinders

MODEL	PART NUMBER	FREE SPEED		POWER		CAPACITY WHEEL		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION	AIR INLET
		rpm		kW	hp	mm	in.	in.	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²	NPTF
RP9118	615 195 9118	20,000		0.175	0.24	51	2.0	3/8-24	4.0	8	140	5.5	0.6	1.2	81	8.5	1/4"
RP9120	615 195 9120	12,000		0.5	0.67	102	4.0	3/8-24	10.0	21	229	9	1.8	4.0	84	7.5	1/4"
RP9121	615 195 9121	12,000		0.5	0.67	127	5.0	3/8-24	10.0	21	229	9	1.9	4.2	84	8.1	1/4"
RP9122	615 195 9122	12,000		0.5	0.67	114	4.5	3/8-24	10.0	21	229	9	1.9	4.2	84	8.1	1/4"
RP9122B	615 195 7122	12,000		0.5	0.67	114	4.5	5/8-11	10.0	21	229	9	1.9	4.2	84	8.1	1/4"
RP9123	615 195 9123	7,500		0.85	1.12	178	7.0	5/8-11	19.0	40	340	13.4	3.4	7.5	93	<2.5	1/2"

Grinders - Accessories

GUARD - FLANGE & FLANGE NUT - SPANNER & KEY

MODEL	DESCRIPTION	PART NUMBER
RP9120	Disc Guard	205 048 487 3
	Flange	205 048 488 3
	Flange Nut	205 048 489 3
	Spanner	205 048 499 3
	Pin wrench	205 048 500 3
	Side Handle	205 048 501 3
RP9121	Disc Guard	205 048 666 3
	Flange	205 048 713 3
	Flange Nut	205 048 712 3
	Spanner	205 048 499 3
	Pin wrench	205 048 667 3
	Side Handle	205 048 501 3
	Complete Sanding kit ø125mm thread pad 3/8"x24	205 049 853 3
RP9122	Disc Guard	205 049 756 3
	Flange	205 048 713 3
	Flange Nut	205 048 712 3
	Spanner	205 048 499 3
	Pin wrench	205 048 667 3
	Side Handle	205 048 501 3
RP9123	Disc Guard	205 050 097 3
	Flange	205 050 096 3
	Flange Nut	205 050 098 3
	Spanner	205 050 119 3
	HEX. Key Wrench	205 050 121 3
RP9111, RP9112Q	Double Ended Spanner	205 049 645 3
	Spanner	205 049 644 3
RP9105, RP9106, RP9107, RP9108, RP9110, RP9776	Spanner (2)	205 048 442 3

TUNGSTEN CARBIDE BURRS 1/8" (3mm) Ø SHANK

N°	A		B		PART N°
	mm	in.	mm	in.	
9	3	1/8	13	1/2	38122
10	3	1/8	13	1/2	38132
11	3	1/8	8	5/16	38142
12	3	1/8	3	1/8	38152
13	3	1/8	8	5/16	38162
14	3	1/8	8	5/16	38172



TUNGSTEN CARBIDE BURRS 1/4" (6mm) Ø SHANK

N°	A		B		PART N°
	mm	in.	mm	in.	
15	6	1/4	13	1/2	38182
16	6	1/4	16	5/8	38192
17	6	1/4	19	3/4	38202
18	6	1/4	6	1/4	38222
19	10	3/8	19	3/4	36122
20	10	3/8	19	3/4	36132
21	10	3/8	19	3/4	36142
22	10	3/8	10	3/8	38232



COLLET GRINDER ACCESSORIES

Aluminum Oxide Mounted Points are available in red grades. Red grades are suitable for grinding high tensile materials such as ordinary and alloy steels, high speed steel and annealed malleable iron.

Tungsten Carbide Burrs are suitable for cutting unhardened and hardened steels, stainless, weld seams, steel castings, light and non-ferrous metals or plastics.

* Maximum permissible speed with 12.7mm or 1/2" spindle overhang.



ACCESSORIES INCLUDED WITH THE TOOL RP9118

DESCRIPTION	PART NUMBER
Grinding wheel 60 Grit (1)	894 016 276 8
Grinding wheel 80 Grit (1)	894 016 276 9
Grinding wheel 120 Grit (1)	894 016 277 0
Pin wrench	894 016 276 3
Spanner	894 016 275 9
Nuts	894 016 276 5

REAR EXHAUST HOSE ASSEMBLY - NOISE REDUCER

MODEL	PART NUMBER
RP9111, RP9112Q	205 051 649 3

COLLET ADAPTER

MODEL	PART NUMBER
For any 1/4" Collet die grinder - Allows use of 1/8" shank burrs	C123029

COLLET

MODEL	CAPACITY	PART NUMBER
RP9104	2.4mm	205 050 788 3
	3mm	205 048 650 3
RP9101, RP9102, RP9105, RP9106, RP9107, RP9108, RP9110, RP9111, RP9112Q, RP9113, RP9114	3mm	205 048 429 2
RP9104	1/8"	205 050 787 3
RP9101, RP9102, RP9105, RP9106, RP9107, RP9108, RP9110, RP9111, RP9112Q, RP9113, RP9114	1/4"	205 048 429 3
	6mm	205 049 583 3
RP9101, RP9102, RP9105, RP9106, RP9107, RP9108, RP9110, RP9111, RP9112Q, RP9113, RP9114	1/8"	205 051 662 3
	1/4"	C138627

MOUNTED POINTS 3mm Ø SHANK - RED

N°	MAX SPEED* rpm	A		B		PART N°
		mm	in.	mm	in.	
1	104,000	5	0.19	5	0.19	38582
3	104,000	5	0.19	8	0.31	38522
6	81,000	6	0.25	6	0.25	38632
7	105,000	4	0.16	4	0.16	38562
8	81,000	6	0.25	6	0.25	38542

MOUNTED POINTS 6mm Ø SHANK - RED

N°	MAX SPEED* rpm	A		B		PART N°
		mm	in.	mm	in.	
1	59,000	16	0.62	16	0.62	435983
2	50,000	20	0.79	16	0.62	435993
3	45,000	20	0.79	28	1.10	436003
4	48,000	20	0.79	32	1.26	436013
5	53,000	20	0.79	22	0.88	436023
6	40,000	13	0.51	25	1.00	436033
6	38,000	25	1.00	3	0.11	436043

Sanders

2 Hand Sanders



RP9534

MODEL	PART NUMBER	FREE SPEED	PAD SIZE		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		rpm	mm	in.	in.	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP9164	615 193 9164	9,600	152	6	5/16-24	8.80	18	222	8.75	1.7	3.8	90	101	7.3
RP9534	615 193 9534	9,000	152	6	5/16-24	8.97	19	190	7.5	1.3	2.9	83	-	<2.5
RP9674	615 193 9674	9,000	152	6	5/16-24	8.97	19	190	7.5	1.3	2.9	83	-	<2.5

All models - Air inlet (NPTF) 1/4"



RP9775

Pistol Sanders and Polishers

MODEL	PART NUMBER	FREE SPEED	PAD SIZE		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		rpm	mm	in.	in.	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP9775	615 193 9775	15,000	75	3	1/4-20F	4.95	10.5	120	4.72	0.68	1.50	86	97	7.1
RP9777	615 193 9777	2,500	75	3	1/4-20F	4.95	10.5	130	5.11	0.79	1.75	88	99	<2.5
RP9776	615 193 9776	14,000	75	3	1/4-20	8.90	19.0	121	4.70	0.70	1.50	77	-	<2.5
RP9778	615 193 9778	18,500	127	5	7/16-20	12.0	26	203	8.0	1.0	2.3	90	101	<2.5

All models - Air inlet (NPTF) 1/4"

RP9776 KIT - Included:

Part number: 615 193 0776

- RP9776 Mini rotary Sander (Qty 1)
- ø 50mm (2") Sanding backing pad (1)
- ø 50mm (2") 60 Grit sanding disc (10)
- ø 50mm (2") 80 Grit sanding disc (10)
- ø 50mm (2") 120 Grit sanding disc (10)
- ø 50mm (2") Surface preparation pad (fine, medium, coarse) (3)
- ø 75mm (3") Sanding backing pad (1)
- ø 75mm (3") 60 Grit sanding disc (10)
- ø 75mm (3") 80 Grit sanding disc (10)
- ø 75mm (3") 120 Grit sanding disc (10)
- ø 75mm (3") Surface preparation pad (fine, medium, coarse) (3)
- Spanner (1)

RP9775 KIT - Included:

Part number: 615 193 0775

- RP9775 Mini random orbital Sander (Qty 1)
- ø 50mm (2") Sanding backing pad (1)
- ø 75mm (3") Sanding backing pad (1)
- ø 50mm (2") 320 Grit sanding disc (10)
- ø 50mm (2") 400 Grit sanding disc (10)
- ø 50mm (2") 600 Grit sanding disc (10)
- Spindle wrench (1)

RP9777 KIT - Included:

Part number: 615 193 0777

- RP9777 Mini disc Polisher (Qty 1)
- ø 75mm (3") Backing pad (1)
- ø 75mm (3") Foam compounding pad (white/yellow) (2)
- ø 75mm (3") Wool buffing pad (1)
- Spindle wrench (1)



Belt Sanders



RP9780

MODEL	PART NUMBER	FREE SPEED	BELT SIZE		POWER		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		rpm	mm	in.	W	hp	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP9779	615 193 9779	22,000	10x330	3/8x13	260	0.35	13.3	28	305	12.0	0.90	1.98	90.5	101.5	<2.5
RP9780	615 193 9780	20,000	20x520	3/4x20.4	380	0.51	14.6	30	380	15.0	1.50	3.30	90.5	101.5	<2.5

All models - Air inlet (NPTF) 1/4"

Accessories

BACKING PADS

MODEL	DESCRIPTION	PART NUMBER
RP9778	ø 3" (75mm) Backing Pad	205 048 506 3
	ø 4-1/2" (110mm) Back-up	205 048 507 3
	ø 5" (125mm) Back-up	205 048 508 3

BACKING PADS

MODEL	DESCRIPTION	PART NUMBER
RP9534, RP9674	ø 6" (150mm) PSA pad	KF140658
	ø 6" (150mm) Velcro™ pad	CA149405
RP9534, RP9674	ø 6" (150mm) PSA pad - 6 holes dust ext.	CA142413
	ø 6" (150mm) Velcro™ pad - 6 holes dust ext.	CA149784
RP9534, RP9674	Pad and Disc kit	352493
	ø 6" (150mm) Pad - 6 holes dust ext.	615 990 118 0
RP9534, RP9674	ø 6" (150mm) Velcro™ pad - 6 holes dust ext.	615 990 126 0
	Keys for pad	164433
RP9534, RP9674	Complete dust extraction kit	894 015 843 0
	ø 6" (150mm) Sanding pad	205 048 825 3
RP9164	ø 6" (150mm) Pad for self-adhesive abrasive	615 990 119 0
	ø 6" (150mm) Velcro™ pad	615 990 125 0
RP9775	ø 3" (75mm) Sanding pad for Hook & Loop abrasive	894 015 833 0
	ø 2" (50mm) Sanding pad for Hook & Loop abrasive	894 015 833 4
RP9775	Key	CA158089
	Spacer	CA158082

SANDING ACCESSORIES

MODEL	DESCRIPTION	PART NUMBER
RP9778	Flange	205 048 505 3
	Hub	205 048 503 3
	Rod-Key	205 048 504 3

BELTS

MODEL	DESCRIPTION	PART NUMBER
RP9779	60 Grit 3/8"x13" (10x330mm) (5)	205 050 444 3
	80 Grit 3/8"x13" (10x330mm) (5)	205 050 445 3
	100 Grit 3/8"x13" (10x330mm) (5)	205 050 446 3
	120 Grit 3/8"x13" (10x330mm) (5)	205 050 447 3
RP9780	60 Grit 3/4"x20.5" (20x520mm) (5)	205 050 448 3
	80 Grit 3/4"x20.5" (20x520mm) (5)	205 050 449 3
	100 Grit 3/4"x20.5" (20x520mm) (5)	205 050 450 3
	120 Grit 3/4"x20.5" (20x520mm) (5)	205 050 451 3

BELT SANDER KEY

MODEL	DESCRIPTION	PART NUMBER
RP9779, RP9880	Hex. Key wrench (4mm)	205 050 026 3
	Hex. Key wrench (2.5mm)	205 050 027 3

NEW

Random Orbital Sanders

2.5 mm (3/32") ORBIT

MODEL	PART NUMBER	FREE SPEED	PAD SIZE		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		PAD TYPE	NOISE LEVEL	VAC
		rpm	mm	in.	in.	l/s	cfm	mm	in.	kg	lb		dB(A)	
RP3600	615 193 3600	12,000	152	6	5/16-24	8	16.9	185	7.2	0.72	1.59	H&L	81	NV
RP3601	615 193 3601	12,000	152	6	5/16-24	8	16.9	185	7.2	0.72	1.59	PSA	81	NV
RP3602	615 193 3602	12,000	152	6	5/16-24	8	16.9	232	9.2	0.76	1.67	H&L	81	SV
RP3603	615 193 3603	12,000	152	6	5/16-24	8	16.9	232	9.2	0.76	1.67	PSA	81	SV
RP3604	615 193 3604	12,000	152	6	5/16-24	8	16.9	221	8.7	0.77	1.70	H&L	81	CV
RP3605	615 193 3605	12,000	152	6	5/16-24	8	16.9	221	8.7	0.77	1.70	PSA	81	CV

All models - Vibration <2.5m/s² - Air inlet (NPTF) 1/4"

5 mm (3/16") ORBIT

MODEL	PART NUMBER	FREE SPEED	PAD SIZE		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		PAD TYPE	NOISE LEVEL	VAC
		rpm	mm	in.	in.	l/s	cfm	mm	in.	kg	lb		dB(A)	
RP3510	615 193 3510	12,000	125	5	5/16-24	8	16.9	160	6.3	0.74	1.63	H&L	81	NV
RP3511	615 193 3511	12,000	125	5	5/16-24	8	16.9	160	6.3	0.74	1.63	PSA	81	NV
RP3512	615 193 3512	12,000	125	5	5/16-24	8	16.9	211	8.3	0.78	1.74	H&L	81	SV
RP3513	615 193 3513	12,000	125	5	5/16-24	8	16.9	211	8.3	0.78	1.74	PSA	81	SV
RP3514	615 193 3514	12,000	125	5	5/16-24	8	16.9	200	7.87	0.79	1.74	H&L	81	CV
RP3515	615 193 3515	12,000	125	5	5/16-24	8	16.9	200	7.87	0.79	1.74	PSA	81	CV
RP3610	615 193 3610	12,000	152	6	5/16-24	8	16.9	185	7.2	0.72	1.63	H&L	81	NV
RP3611	615 193 3611	12,000	152	6	5/16-24	8	16.9	185	7.2	0.72	1.63	PSA	81	NV
RP3612	615 193 3612	12,000	152	6	5/16-24	8	16.9	232	9.2	0.78	1.72	H&L	81	SV
RP3613	615 193 3613	12,000	152	6	5/16-24	8	16.9	232	9.2	0.78	1.72	PSA	81	SV
RP3614	615 193 3614	12,000	152	6	5/16-24	8	16.9	221	8.7	0.79	1.74	H&L	81	CV
RP3615	615 193 3615	12,000	152	6	5/16-24	8	16.9	221	8.7	0.79	1.74	PSA	81	CV

All models - Vibration <2.5m/s² - Air inlet (NPTF) 1/4"

10 mm (3/8") ORBIT

MODEL	PART NUMBER	FREE SPEED	PAD SIZE		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		PAD TYPE	NOISE LEVEL	VAC
		rpm	mm	in.	in.	l/s	cfm	mm	in.	kg	lb		dB(A)	
RP3620	615 193 3620	12,000	152	6	5/16-24	8	16.9	185	7.2	0.79	1.74	H&L	81	NV
RP3621	615 193 3621	12,000	152	6	5/16-24	8	16.9	185	7.2	0.79	1.74	PSA	81	NV
RP3622	615 193 3622	12,000	152	6	5/16-24	8	16.9	232	9.2	0.82	1.81	H&L	81	SV
RP3623	615 193 3623	12,000	152	6	5/16-24	8	16.9	232	9.2	0.82	1.81	PSA	81	SV
RP3624	615 193 3624	12,000	152	6	5/16-24	8	16.9	221	8.7	0.83	1.83	H&L	81	CV
RP3625	615 193 3625	12,000	152	6	5/16-24	8	16.9	221	8.7	0.83	1.83	PSA	81	CV

All models - Vibration <2.5m/s² - Air inlet (NPTF) 1/4"

Accessories

SANDING PADS

MODEL	DESCRIPTION	PART NUMBER
RP3600/10/20	150 mm (6") Pad H&L	205 052 303 3
RP3601/11/21	150 mm (6") Pad PSA	205 052 302 3
RP3602/04/12/14/22/24	150 mm (6") Pad H&L with 6 holes	205 052 305 3
RP3603/05/13/15/23/25	150 mm (6") Pad PSA with 6 holes	205 052 304 3
RP3510	125 mm (5") Pad H&L	205 052 847 3
RP3511	125 mm (5") Pad PSA	205 052 845 3
RP3512/14	125 mm (5") Pad H&L with 5 holes	205 052 848 3
RP3513/15	125 mm (5") Pad PSA with 5 holes	205 052 846 3

DUST EXTRACTION KIT FOR SELF GENERATE VACUUM

MODEL	DESCRIPTION	PART NUMBER
RP3602/03/12/13/22/23	Dust extraction kit (Incl. 1 dust bag and its dust hose)	205 052 245 3
RP3512/13	Dust bag set (Incl. 5 dust bags)	205 052 320 3
	Dust bag set (Incl. 1 dust bag)	205 052 306 3

VACUUM HOSE ADAPTOR FOR CENTRAL VACUUM SANDERS

MODEL	DESCRIPTION	PART NUMBER
RP3604/05/14/15/24/25	Vacuum hose adaptor ø25 mm (1") / ø32 mm (1-1/4")	615 350 117 0
RP3514/15	Vacuum hose adaptor ø25 mm (1") / ø28 mm (1-1/4")	615 804 448 0



2.5mm (3/32") Dia. Orbit
For Ultra Fine sanding



5mm (3/16") Dia. Orbit
For General sanding



10mm (3/8") Dia. Orbit
For Aggressive sanding



MISCELLANEOUS

MODEL	DESCRIPTION	PART NUMBER
RP3600/01/02/03/04/05	Swivel air inlet	205 052 373 3
All Models	Pad wrench	205 052 309 3

Hammers



RP9536



RP9312

MODEL	PART NUMBER	POWER	COLD RIVET CAP. (DURAL)		COLD RIVET CAP. (STEEL)		BORE AND STROKE		BLOWS PER MIN.	CHISEL RIVET SET SHANK		AIR CONS.		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		Joule	mm	in.	mm	in.	mm	in.	BPM	mm	in.	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
○ RP9536	615 196 9536	5.7	6.4	1/4	4.8	3/16	19x67	3/4x2 ^{5/8}	3,200	102	0.401	7.0	14	230	9.0	1.7	3.7	97	108	5.9
○ RP9537	615 196 9537	7.7	7.9	5/16	6.4	1/4	19x90	3/4x3 ^{1/2}	2,200	102	0.401	8.0	17	280	11.0	2.1	4.6	95	106	4.2
○ RP9311	615 196 9311	5.7	6.4	1/4	4.8	3/16	19x67	3/4x2 ^{5/8}	3,000	102	0.401	11.8	25	171	6.7	1.6	3.5	100	111	8.9
○ RP9312	615 196 9312	5.7	6.4	1/4	4.8	3/16	19x67	3/4x2 ^{5/8}	3,000	102	0.401	11.8	25.0	171	6.7	1.6	3.5	100	111	8.9
○ RP9315	615 196 9315	7.6	7.9	5/16	6.4	1/4	19x89	3/4x3 ^{1/2}	2,300	102	0.401	11.8	25.0	225	8.9	1.9	4.2	100	111	9.4
○ RP9538	615 196 9538						25x28.6	1x1 ^{1/8}	4,600	127	1/2Sq.	7.4	15.5	457	18.0	2.8	6.2	99	110	9.7

All models - Air inlet (NPTF) 1/4"

RP9538 needle scaler and weld flux chipper

RP9311 KIT - Round shank - Included: ○

Part number: 615 196 0311

- RP9311 Hammer (Qty 1)

- 178mm (7") chisels (5)

- Air nipple (1)

- Chisel retainer (1)

- Mini oiler (brass) (1)



RP9312 KIT - Hex. shank - Included: ○

Part number: 615 196 0312

- RP9312 Hammer (Qty 1)

- 178mm (7") chisels (5)

- Air nipple (1)

- Chisel retainer (1)


- Mini oiler (brass) (1)

Accessories

0.401" (10.2mm) - ROUND SHANK FOR HAMMERS RP9311/RP9315/RP9536/RP9537



INDEX N°	LENGTH		WIDTH	DESCRIPTION	PART NUMBER
	mm	in.	mm		
1	165	6.5	16	Rivet cutter	A046050
2	165	6.5	32.40	Angle scaling chisel	A046063
3	178	7.0		Diamond point chisel	A046064
4	178	7.0	20.90	Twin blade panel (pipe) cutter	A046071
5	178	7.0	19.10	Cold chisel	A046073
5	457	18.0	19.10	Cold chisel	A046080
6	178	7.0		Straight punch	A046074
7	178	7.0	25.90	Spot weld splitter	A046075
8	178	7.0		Tapered punch	A046078

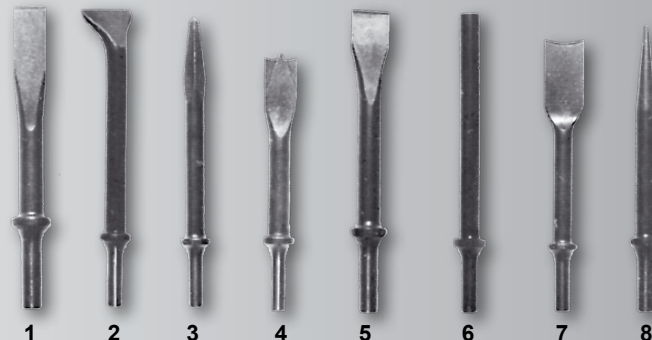

0.401" (10.2mm) - HEXAGONAL SHANK FOR HAMMER RP9312



INDEX N°	LENGTH		WIDTH	DESCRIPTION	PART NUMBER
	mm	in.	mm		
1	165	6.5	16	Hex rivet cutter	CA155778
2	178	7.0	32.40	Hex angle scaling chisel	CA155780
3	178	7.0		Hex diamond point chisel	CA155782
4	165	6.5	20.90	Hex twin blade panel (pipe) cutter	CA155784
5	178	7.0	19.10	Hex cold chisel	CA155786
6	178	7.0		Hex straight punch	CA155790
7	178	7.0	25.90	Hex spot weld splitter	CA155792
8	178	7.0		Hex tapered punch	CA157107


HAMMER RETAINER

MODEL	DESCRIPTION	PART NUMBER
RP9536, RP9537	Retainer spring	205 052 740 3
RP9311, RP9315, RP9312	Retainer spring	205 052 533 3
RP9311, RP9315, RP9312	Retainer - Quick change	205 048 741 3



CHISELS

MODEL	DESCRIPTION	PART NUMBER
RP9538	Curved chisel 1.37" (35mm) Qty. 1	205 049 965 3
RP9538	Pointed chisel Qty. 1	205 051 279 3
RP9538	Flat chisel 0.79" (20mm) Qty. 1	205 051 280 3



NEEDLE SETS

MODEL	DESCRIPTION	PART NUMBER
RP9538	Needle set pointed tip, Ø 1/8" (3mm) length 7" (178mm) Qty. 100	615 399 821 0
	Needle set chisel tip, Ø 1/8" (3mm) length 7" (178mm) Qty. 100	615 399 819 0
RP9538	Needle set flat tip, Ø 1/8" (3mm) length 7" (178mm) Qty. 100	615 399 817 0
	Steel Needle flat set, Ø 1/8" (3mm) length 7" (178mm) Qty. 19	P100146
RP9538	Stainless Needle flat set, Ø 1/8" (3mm) length 7" (178mm) Qty. 19	P106454

Specialty tools



RP9884



RP9160



RP9840/50



RP9888



RP9705/10

MODEL	PART NUMBER	WHEEL DIAMETER		MAX. SPEED	BLOWS PER MIN.	STROKE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION	AIR INLET
		mm	in.	rpm		mm	in.	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²	NPTF
RP9881	615 197 9881	-	-	-	5,000	25	1	13.0	27	268	10.5	1.0	2.20	81	<2.5	1/4"
RP9882	615 197 9882	-	-	-	9,500	10	3/8	2.8	6	219	8.63	0.74	1.63	97.7	12.9	1/4"
RP9884	615 197 9884	76	3	22,000	-	-	-	5.9	12.5	184	7.25	0.79	1.75	99	4.0	1/4"
RP9160	615 197 9160	-	-	-	32,400	-	-	0.8	1.69	147	5.8	0.123	0.25	59	<7.0	1/4"

RP9881 / RP9882 - Reciprocating Saw • RP9884 - High Speed Cutter • RP9160 - Engraving Pen

MODEL	PART NUMBER	MAX. AXIAL PULLING LOAD		MAX. STROKE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION	AIR INLET
		KG	lb@85psi	mm	in.	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²	NPTF
RP9840	615 197 9840	1089	2400	19.5	0.767	1.85	4.0	290	11.40	1.88	4.10	72	<2.5	1/4"
RP9850	615 197 9850	1679	3700	15.0	0.590	1.85	4.0	301	11.85	1.95	4.29	66	3.2	1/4"
RP9880	615 197 9880	-	-	-	-	10.54	22.0	245	10.00	0.13	0.29	95	-	1/4"
RP9885	615 197 9885	-	-	-	-	8.0	16.8	270	10.06	1.04	2.32	82	<2.5	1/4"

RP9840 - Air Riveter 3/32"-3/16" • RP9850 - Air Riveter 3/16"-1/4" • RP9880 - Blow Gun • RP9885 - Caulking Gun

MODEL	PART NUMBER	BLOWS PER MIN.	STROKE LENGTH	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION	AIR INLET
		BPM	mm	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²	NPTF
RP9888	615 197 9888	2,750	-	-	5.5	-	-	1.10	-	-	5.4	1/4"
RP9889	615 197 9889	2,400	-	-	5.0	-	-	1.12	-	-	3.2	1/4"
RP9705	615 197 9705	12,000	3-5	-	6.0	-	-	0.56	-	-	5.0	1/4"
RP9710	615 197 9710	8,000	7-10	-	6.0	-	-	0.59	-	-	5.0	1/4"

RP9888 - Air Nibbler • RP9889 - Shear • RP9705 - Air File 5mm • RP9710 - Air File 10mm

Accessories

AIR FILE RP9705 / RP9710

DESCRIPTION	PART NUMBER
5mm (0.2") Shank File rectangular (5)	205 051 911 3
5mm (0.2") Shank File round (5)	205 051 912 3
5mm (0.2") Shank File half round (5)	205 051 913 3
5mm (0.2") Shank File triangular (5)	205 051 914 3
Swivel air inlet	205 052 373 3

RECIPROCATING SAW RP9881

DESCRIPTION	PART NUMBER
14T Saw blade (1)	205 048 893 3
18T Saw blade (1)	205 048 894 3
24T Saw blade (1)	205 048 895 3
Hex. Wrench	205 048 899 3

RECIPROCATING SAW RP9882

DESCRIPTION	PART NUMBER
18T Saw blades (5)	CA146719
24T Saw blades (5)	CA146720
32T Saw blades (5)	CA146721

AIR RIVETER RP9840

DESCRIPTION	PART NUMBER
Spent mandrel bottle kit	205 051 801 3
Nose piece (4) 3/32", 1/8", 5/32", 3/16" (2.4, 3.2, 4, 4.8mm)	205 051 802 3

AIR RIVETER RP9850

DESCRIPTION	PART NUMBER
Spent mandrel bottle kit	205 051 801 3
Nose piece (3) 3/16", 7/32", 1/4" (4.8, 5.6, 6.4mm)	205 051 805 3

NIBBLER RP9888

DESCRIPTION	PART NUMBER
Punch set	KF137310
Die	KF137273

Airline accessories

QUICK-CHANGE COUPLERS

COUPLER SIZE	CFM*	THREAD SIZE In.	COUPLER BODY FPT	NIPPLE FPT	NIPPLE MPT
6	31	1/4"	CA046300 (13)	CA046301 (3c)	CA046302 (2c)
9	70	1/4"	CA047300 (15c)	CA047302 (1e)	CA047303 (0e)
9	70	3/8"	CA047301 (15)	CA047304 (3e)	CA047305 (2e)
12.5	125	3/8"	CA049300 (17e)	CA049302 (1f)	CA049303 (0f)
12.5	125	1/2"	CA049301 (17)	CA049304 (3f)	CA049305 (2f)

Numbers in parentheses indicate mfg. identification stamped on couplers.

*Recommended working CFM - 30% of maximum flow (ASME power test).

HOSE WHIPS MALE ENDS

HOSE DIA in.	THREAD SIZE in.	HOSE LGTH. cm (ft.)	PART NUMBER
6	1/4"	183 (6)	CA046270
9	1/4"	61 (2)	CA047270
9	3/8"	183 (6)	CA047271
12.5	3/8"	91.5 (3)	CA049271
12.5	1/2"	61 (2)	CA049270

Always use a hose whip between the tool and the air supply hose for safety and longer life of the tool air inlet.



www.redipower.com



Please find your local contact at: www.cp.com

